

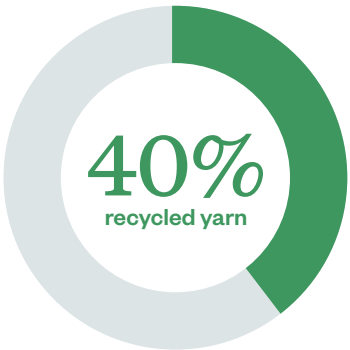


## outdoor • stain resistance

General Information	Specifications	Care												
 <p><b>Composition</b> 60%PP 40%PES REC</p> <p><b>Width</b> 140 + 4cm</p> <p><b>Weight</b> 371 gr/m<sup>2</sup> ± 5 % 520 gr/lm ± 5 %</p> <p><b>Custom code</b> UE: 5407.73.00 USA: 5407.73.20.60</p> <p><b>Laboratory test number</b> IN-01025/2014 IN-00357/2010</p>	<p><b>Seam slippage resistance (mm)</b> Warp: 1,90 Weft: 2,20 EN ISO 13936/2:2004</p> <p><b>Abrasion resistance (End point)</b> 60.000 EN ISO 12947-2:1998</p> <p><b>Abrasion resistance (change of aspect: 3000 cycles)</b> 4-5 EN ISO 12947/4:1998 and EN 14465:2003 (Annex A)</p> <p><b>Pilling resistance</b> 4-5 EN ISO 12945/2:2000</p> <p><b>Lightfastness to weather</b> &gt;6 EN ISO 105-B04:1997 (1000 hours)</p> <p><b>Colour fastness to rubbing</b> Wet: 4-5 / Dry: 4-5 EN ISO 105-X12:2002</p> <p><b>Resistance to putrefaction (Mould &amp; bacterium)</b> Face fabric EN 20811:1992 - AATCC 30:2004</p> <p><b>Swimming pool chlorine fastness</b> 4-5 EN ISO 105-E03:1993</p> <p><b>Sea water fastness</b> 4-5 EN ISO 105-E02:1996</p> <p><b>Urine fastness</b> 4-5 EN ISO 105-E01:1996</p>	<p><b>Washing conditions</b> </p> <p><b>Soiling and cleanability</b> 4 FORD FLTM BN 112-08:2005</p> <p><b>Dimensional change domestic washing and drying (%)</b> Warp: -2 Weft: -2 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>Bleach cleanable 80% water 20% bleach. In case of mould growth, machine-wash with a mild laundry detergent and add 0,2 liter of household bleach to the first rinse cycle. Wash at 40° C during at least 30 minutes. Use gentle cycle with minimal centrifugation.</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p> <p>Notes: Stain repellence protection</p> <hr/> <p><b>Ignitability</b></p> <table border="0"> <tr> <td>BS5852 Source 0</td> <td>Upon Request:</td> </tr> <tr> <td>EN1021-Part 1:2006</td> <td>BS5852 Source 1</td> </tr> <tr> <td>CAL TB 117:2013</td> <td>EN1021-Part 2:2006</td> </tr> <tr> <td>NFPA 260:2013</td> <td>BS 7176 Low Hazard</td> </tr> <tr> <td></td> <td>UNI 9175 Clase 3IM</td> </tr> <tr> <td></td> <td>IMO Anexo 1 Parte 8</td> </tr> </table>	BS5852 Source 0	Upon Request:	EN1021-Part 1:2006	BS5852 Source 1	CAL TB 117:2013	EN1021-Part 2:2006	NFPA 260:2013	BS 7176 Low Hazard		UNI 9175 Clase 3IM		IMO Anexo 1 Parte 8
BS5852 Source 0	Upon Request:													
EN1021-Part 1:2006	BS5852 Source 1													
CAL TB 117:2013	EN1021-Part 2:2006													
NFPA 260:2013	BS 7176 Low Hazard													
	UNI 9175 Clase 3IM													
	IMO Anexo 1 Parte 8													

## Environmental considerations

 <p><b>40% GRS recycled PET bottles</b> <b>60% Low impact yarn (PP)</b></p>	<p><b>Life cycle analysis</b> Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p><b>Carbon footprint</b> <b>2,19</b> kg CO<sub>2</sub> eq / m 20,94% less since 2020</p> <p><b>Water consumption</b> <b>31,32</b> liters / m 21,31% less since 2020</p>	 <p><b>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH</b> Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p>
--	---	---

Designed and Crafted in Terrassa (Barcelona)

## Certificates

