

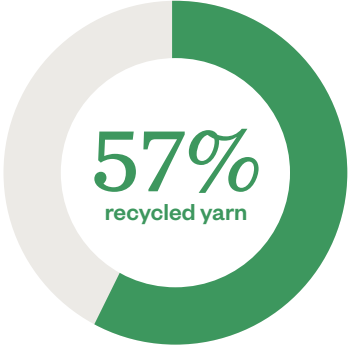



5 years guarantee

| General Information | Specifications | Care | | | | | | | | | | |
|---|---|---|-----------------|--------------------|--------------------|--------------------|-----------------|--------------------|---------------|--|-----------------|--|
|  <p>Composition 48%PES REC 32%PES 11%MA 9%CO REC</p> <p>Width 140 + 4cm</p> <p>Weight 639 gr/m² ± 5 % 895 gr/lm ± 5 %</p> <p>Custom code UE: 5801.36.00 USA: 5801.36.00.20</p> <p>Laboratory test number IN-00711-2024-1</p> | <p>Seam slippage resistance (mm) Warp: 1,8 Weft: 1,2 EN ISO 13936/2:2004</p> <p>Abrasion resistance (Full worn off) 90.000 EN ISO 12947-2:1998</p> <p>Pilling resistance 4-5 EN ISO 12945/2:2000</p> <p>Lightfastness 5-6 EN ISO 105-B02:1998 and 105 B02/A01:2002</p> <p>Colour fastness to rubbing Dry: 4-5 Wet: 4-5 EN ISO 105-X12:2002</p> | <p>PERFORMANCE+ Easy to clean, longlasting fabrics</p> <p>Washing conditions</p>  <p>Soiling and cleanability 4-5 FORD FLTM BN 112-08:2005</p> <p>Dimensional change domestic washing and drying (%) Warp: -3 Weft: -2 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>When confectioning or washing the sofa cover with veloro please attach a protective cloth.</p> <p>Ignitability</p> <table border="0"> <tr> <td>BS5852 Source 0</td> <td>EN1021-Part 2:2006</td> </tr> <tr> <td>EN1021-Part 1:2006</td> <td>BS 7176 Low Hazard</td> </tr> <tr> <td>CAL TB 117:2013</td> <td>UNI 9175 Clase 3IM</td> </tr> <tr> <td>NFPA 260:2013</td> <td></td> </tr> <tr> <td>BS5852 Source 1</td> <td></td> </tr> </table> | BS5852 Source 0 | EN1021-Part 2:2006 | EN1021-Part 1:2006 | BS 7176 Low Hazard | CAL TB 117:2013 | UNI 9175 Clase 3IM | NFPA 260:2013 | | BS5852 Source 1 | |
| BS5852 Source 0 | EN1021-Part 2:2006 | | | | | | | | | | | |
| EN1021-Part 1:2006 | BS 7176 Low Hazard | | | | | | | | | | | |
| CAL TB 117:2013 | UNI 9175 Clase 3IM | | | | | | | | | | | |
| NFPA 260:2013 | | | | | | | | | | | | |
| BS5852 Source 1 | | | | | | | | | | | | |

Environmental considerations

| | | |
|---|--|---|
|  <p>48% GRS recycled PET bottles 9% Recycled CO 32% PES 11% MA</p> | <p>Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p>Carbon footprint 5,45 kg CO₂ eq/m</p> <p>Water consumption 148,06 liters/m</p> |  <p>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p> |
|---|--|---|

Designed and Crafted in Terrassa (Barcelona)

Certificates

