

5 years guarantee

General Information



Composition
50%PES REC 37%PES 7%CO REC
6%OF REC

Width
140 + 4cm

Weight
470 gr/m2 ± 5 %
658 gr/lm ± 5 %

Custom code
UE: 5801.36.00
USA: 5801.36.00.20

Laboratory test number
IN-01060-2024-1

Specifications

Seam slippage resistance (mm)
Warp: 1,7
Weft: 1,5
EN ISO 13936/2:2004

Abrasion resistance (Fully worn off)
70.000 EN ISO 12947-2:2016

Pilling resistance
4-5 EN ISO 12945/2:2000

Lightfastness
5-6 EN ISO 105-B02:1998
and 105 B02/A01:2002

Care

PERFORMANCE+
Easy to clean, longlasting fabrics

Washing conditions

Soiling and cleanliness
4-5 FORD FLTM BN 112-08:2005


Dimensional change domestic washing and drying (%)
Warp: -3%
Weft: -3%
EN ISO 3759:2008, EN ISO 6330:2000
and EN ISO 5077:2008

When confectioning or washing the sofa cover with veloro please attach a protective cloth.

Ignitability

| | |
|---|--|
| BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013 | Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM |
|---|--|

Environmental considerations

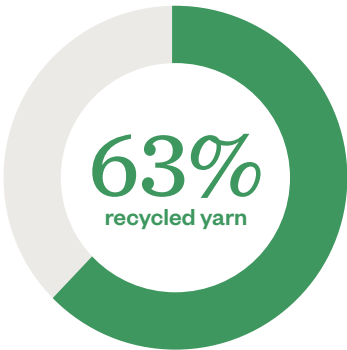

50% GRS recycled PET bottles
7% Recycled CO
6% Circular yarn from own waste
37% PES

Life cycle analysis
Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.

Carbon footprint
4,09 kg CO₂ eq /m

Water consumption
100,58 liters/m

**UNIVERSITAT POLITÈCNICA DE CATALUNYA
BARCELONATECH**
Escola Superior d'Enginyeries Industrial,
Aeroespacial i Audiovisual de Terrassa

Study realized in collaboration with UPC

Methodology:
Life Cycle Analysis. ISO 14040 standard.

Database:
Own data, Ecoinvent 3.6 database and published data.

Functional unit:
1 linear meters, 140 cm width.

Calculation methodology:
ReCiPe Midpoint (H) 2016 v1.0
ReCiPe Endpoint (H) 2016 v1.04
IPCC 2013 GWP 100a v1.03

Designed and Crafted
in Terrassa (Barcelona)

Certificates

