
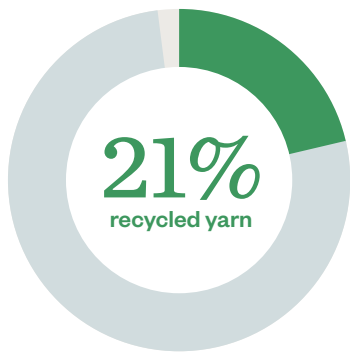



outdoor • waterproof • fire resistant • easy stain release • bleach cleanable

General Information	Specifications	Care										
 <p>Composition 77%PP 21%PET REC 2%PU</p> <p>Width 140 + 4cm</p> <p>Weight 750 gr/m² ± 5 % 1050 gr/lm ± 5 %</p> <p>Custom code UE: 5903.20.90 USA: 5903.20.18.00</p> <p>Laboratory test number IN-00663-2025-1</p>	<p>Seam slippage resistance (mm) Warp: 1,2 Weft: 1 EN ISO 13936/2:2004</p> <p>Abrasion resistance (End point) ≥50.000 EN ISO 12947-2:2016</p> <p>Abrasion resistance (change of aspect: 3000 cycles) 3-4 EN ISO 12947/4:1998 and EN 14465:2003 (Annex A)</p> <p>Pilling resistance 4-5 EN ISO 12945/2:2000</p> <p>Lightfastness to weather ≥6 EN ISO 105-B04:1997 (1000 hours)</p> <p>Colour fastness to rubbing Wet: 4-5 Dry: 4-5 EN ISO 105-X12:2002</p> <p>Colour fastness to domestic and commercial laundering (30°) 4-5 EN ISO 105-C06:1997/AC:2009</p> <p>Swimming pool chlorine fastness 4-5 EN ISO 105-E03:1993</p> <p>Sea water fastness 4-5 EN ISO 105-E02:1996</p>	<p>Washing conditions</p>  <p>Dimensional change domestic washing and drying (%) Warp: -2% Weft: -2% EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>Bleach cleanable 80% water 20% bleach. In case of mould growth, machine-wash with a mild laundry detergent and add 0,2 liter of household bleach to the first rinse cycle. Wash at 40°C during at least 30 minutes. Use gentle cycle with minimal centrifugation.</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p> <p>Ignitability</p> <table border="0"> <tr> <td>BS5852 Source 0</td> <td>EN1021-Part 2:2006</td> </tr> <tr> <td>EN1021-Part 1:2006</td> <td>IMO Anexo 1 Parte 8</td> </tr> <tr> <td>CAL TB 117:2013</td> <td>Upon Request:</td> </tr> <tr> <td>NFPA 260:2013</td> <td>BS 7176 Low Hazard</td> </tr> <tr> <td>BS5852 Source 1</td> <td>UNI 9175 Clase 3IM</td> </tr> </table>	BS5852 Source 0	EN1021-Part 2:2006	EN1021-Part 1:2006	IMO Anexo 1 Parte 8	CAL TB 117:2013	Upon Request:	NFPA 260:2013	BS 7176 Low Hazard	BS5852 Source 1	UNI 9175 Clase 3IM
BS5852 Source 0	EN1021-Part 2:2006											
EN1021-Part 1:2006	IMO Anexo 1 Parte 8											
CAL TB 117:2013	Upon Request:											
NFPA 260:2013	BS 7176 Low Hazard											
BS5852 Source 1	UNI 9175 Clase 3IM											

Environmental considerations

 <p>21% recycled yarn</p> <p>21% GRS recycled PET bottles 77% Low impact yarn (PP) 2% PU</p>	<p>Life cycle analysis Cradle to grave assessment. From raw material extraction to end of use scenarios (75% Landfilling – 20% Incineration – 5% Recycling): Resources, yarn production and dyeing, fabric weaving and finishing, waste recycling, daily use and end of life.</p> <p>Carbon footprint 6,5 kg CO₂ eq/m</p> <p>Water consumption 155,75 liters/m</p>	 <p>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p> <p>Usage scenario: 1 home wash per year 1 vacuum per month For 15 years</p> <p>End-of-life scenario: 75% Landfill 20% Incineration 5% Recycling</p>
--	--	---

Designed and Crafted in Terrassa (Barcelona)

Certificates

