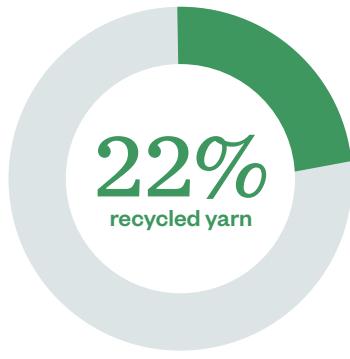


outdoor • fire resistant • easy stain release • bleach cleanable

General Information	Specifications	Care										
 <p>Composition 78%PP 22%PET REC</p> <p>Width 140 + 4cm</p> <p>Weight 736 gr/m² ± 5 % 1030 gr/m ± 5 %</p> <p>Custom code UE: 5407.73.00 USA: 5407.73.20.60</p> <p>Laboratory test number IN-00663-2025-1</p>	<p>Seam slippage resistance (mm) Warp: 1,2 Weft: 1 EN ISO 13936/2:2004</p> <p>Abrasion resistance (End point) ≥50.000 EN ISO 12947-2:2016</p> <p>Abrasion resistance (change of aspect: 3000 cycles) 3-4 EN ISO 12947/4:1998 and EN 14465:2003 (Annex A)</p> <p>Pilling resistance 4-5 EN ISO 12945/2:2000</p> <p>Lightfastness to weather ≥6 EN ISO 105-B04:1997 (1000 hours)</p> <p>Colour fastness to rubbing Wet: 4-5 Dry: 4-5 EN ISO 105-X12:2002</p> <p>Colour fastness to domestic and comercial laundering (30°) 4-5 EN ISO 105-C06:1997/AC:2009</p> <p>Swimming pool chlorine fastness 4-5 EN ISO 105-E03:1993</p> <p>Sea water fastness 4-5 EN ISO 105-E02:1996</p>	<p>Washing conditions</p>  <p>Dimensional change domestic washing and drying (%) Warp: -2% Weft: -2% EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>Bleach cleanable 80% water 20% bleach. In case of mould growth, machine-wash with a mild laundry detergent and add 0,2 liter of household bleach to the first rinse cycle. Wash at 40°C during at least 30 minutes. Use gentle cycle with minimal centrifugation.</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p>										
<h3>Ignitability</h3>												
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">BS5852 Source 0</td> <td style="width: 50%;">EN1021-Part 2:2006</td> </tr> <tr> <td>EN1021-Part 1:2006</td> <td>IMO Anexo 1 Parte 8</td> </tr> <tr> <td>CAL TB 117:2013</td> <td>Upon Request:</td> </tr> <tr> <td>NFPA 260:2013</td> <td>BS 7176 Low Hazard</td> </tr> <tr> <td>BS5852 Source 1</td> <td>UNI 9175 Clase 3IM</td> </tr> </table>			BS5852 Source 0	EN1021-Part 2:2006	EN1021-Part 1:2006	IMO Anexo 1 Parte 8	CAL TB 117:2013	Upon Request:	NFPA 260:2013	BS 7176 Low Hazard	BS5852 Source 1	UNI 9175 Clase 3IM
BS5852 Source 0	EN1021-Part 2:2006											
EN1021-Part 1:2006	IMO Anexo 1 Parte 8											
CAL TB 117:2013	Upon Request:											
NFPA 260:2013	BS 7176 Low Hazard											
BS5852 Source 1	UNI 9175 Clase 3IM											
Environmental considerations												
 <p>22% recycled yarn</p> <p>22% GRS recycled PET bottles 78% Low impact yarn (PP)</p>	<p>Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p>Carbon footprint 4,9 kg CO₂ eq./m</p> <p>Water consumption 69,7 liters/m</p>	 <p>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p>										
<p>Designed and Crafted in Terrassa (Barcelona)</p>	<p>Certificates</p>											