


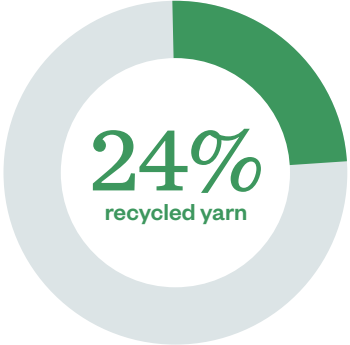



5 years guarantee • sanitized

| General Information | Specifications | Care | | |
|--|---|---|---|--|
|  <p>Composition 76%PES 17%PES REC 4%OF 3%CO REC</p> <p>Width 140 + 4cm</p> <p>Weight 568 gr/m² ± 5 % 795 gr/lm ± 5 %</p> <p>Custom code UE: 5407.83.00 USA: 5407.83.00.90</p> <p>Laboratory test number IN-00807-2018-B 2020AN1320 EN ISO 20743</p> | <p>Seam slippage resistance (mm) Warp: 1,90 Weft: 1,70 EN ISO 13936/2:2004</p> <p>Abrasion resistance (End point) 35.000 EN ISO 12947-2:1998</p> <p>Abrasion resistance (change of aspect: 3000 cycles) 3-4 EN ISO 12947/4:1998 and EN 14465:2003 (Annex A)</p> <p>Pilling resistance 4-5 EN ISO 12945/2:2000</p> <p>Lightfastness >6 EN ISO 105-B02:1998 and 105 B02/A01:2002</p> <p>Colour fastness to rubbing Dry: 4-5 Wet: 4-5 EN ISO 105-X12:2002</p> | <p>Care</p> <p>PERFORMANCE+ Easy to clean, longlasting fabrics</p> <p>Washing conditions </p> <p>Soiling and cleanability 4-5 FORD FLTM BN 112-08:2005</p> <p>Dimensional change domestic washing and drying (%) Warp: -3 Weft: -1 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p> <p>Antibacterial activity Strong antibacterial property >3 EN ISO 20743:2013</p>  <p>Ignitability</p> <table border="0"> <tr> <td>BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013</td> <td>Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM</td> </tr> </table> | BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013 | Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM |
| BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013 | Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM | | | |

Environmental considerations

| | | |
|---|---|--|
|  <p>24% recycled yarn</p> <p>17% GRS recycled PET bottles 4% Circular yarn from own waste 3% Recycled CO 76% Low impact yarn (PP)</p> | <p>Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p>Carbon footprint 3,66 kg CO₂ eq / m 11,17% less since 2020</p> <p>Water consumption 70,28 liters / m 24,83% less since 2020</p> |  <p>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH</p> <p>Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p> |
|---|---|--|

Designed and Crafted
in Terrassa (Barcelona)

Certificates

