

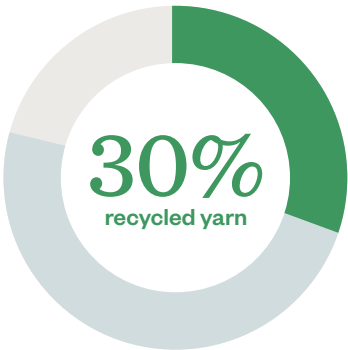


5 years guarantee • fire resistant

General Information	Specifications	Care										
 <p><b>Composition</b> 50%PP 20%MA 17%CO 13%PES</p> <p><b>Width</b> 140 + 4cm</p> <p><b>Weight</b> 470 gr/m<sup>2</sup> ± 5 % 658 gr/lm ± 5 %</p> <p><b>Custom code</b> UE: 5407.83.00 USA: 5407.83.00.90</p> <p><b>Laboratory test number</b> Docs. 12114, 12115, 12116, 12118, 12259</p>	<p><b>Seam slippage resistance (mm)</b> Warp: 3,00 Weft: 3,00 EN ISO 13936/2:2004</p> <p><b>Abrasion resistance (End point)</b> 34.000 EN ISO 12947-2:1998</p> <p><b>Abrasion resistance (change of aspect: 3000 cycles)</b> 4 EN ISO 12947/4:1998 and EN 14465:2003 (Annex A)</p> <p><b>Pilling resistance</b> 5 EN ISO 12945/2:2000</p> <p><b>Lightfastness</b> &gt;6 EN ISO 105-B02:1998 and 105 B02/A01:2002</p> <p>Notes: Bleach cleanable 80% water 20% bleach.</p>	<p><b>PERFORMANCE+</b> Easy to clean, longlasting fabrics</p> <p><b>Washing conditions</b> </p> <p><b>Soiling and cleanability</b> 4-5 FORD FLTM BN 112-08:2005</p> <p><b>Dimensional change domestic washing and drying (%)</b> Warp: -1,5 Weft: -1,5 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p> <p><b>Ignitability</b></p> <table border="0"> <tr> <td>BS5852 Source 0</td> <td>EN1021-Part 2:2006</td> </tr> <tr> <td>EN1021-Part 1:2006</td> <td>BS 7176 Low Hazard</td> </tr> <tr> <td>CAL TB 117:2013</td> <td>UNI 9175 Clase 3IM</td> </tr> <tr> <td>NFPA 260:2013</td> <td></td> </tr> <tr> <td>BS5852 Source 1</td> <td></td> </tr> </table>	BS5852 Source 0	EN1021-Part 2:2006	EN1021-Part 1:2006	BS 7176 Low Hazard	CAL TB 117:2013	UNI 9175 Clase 3IM	NFPA 260:2013		BS5852 Source 1	
BS5852 Source 0	EN1021-Part 2:2006											
EN1021-Part 1:2006	BS 7176 Low Hazard											
CAL TB 117:2013	UNI 9175 Clase 3IM											
NFPA 260:2013												
BS5852 Source 1												

## Environmental considerations

 <p><b>30%</b> recycled yarn</p> <p>13% GRS recycled PET bottles 17% Recycled CO 50% Low impact yarn (PP) 20% MA</p>	<p><b>Life cycle analysis</b> Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p><b>Carbon footprint</b> <i>In process</i> kg CO<sub>2</sub> eq / m -</p> <p><b>Water consumption</b> <i>In process</i> liters / m -</p>	<p> <b>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH</b> Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p>
---	--	---

Designed and Crafted in Terrassa (Barcelona)

## Certificates

