

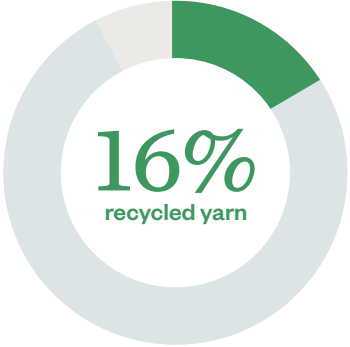



5 years guarantee • fire resistant

General Information	Specifications	Care										
 <p>Composition 77%PP 10%PES REC 7%MA 6%CO REC</p> <p>Width 140 + 4cm</p> <p>Weight 568 gr/m² ± 5 % 795 gr/lm ± 5 %</p> <p>Custom code UE: 5407.83.00 USA: 5407.83.00.90</p> <p>Laboratory test number IN-00825-2020-2</p>	<p>Seam slippage resistance (mm) Warp: 2,50 Weft: 2,00 EN ISO 13936/2:2004</p> <p>Abrasion resistance (End point) 80.000 EN ISO 12947-2:1998</p> <p>Pilling resistance 4-5 EN ISO 12945/2:2000</p> <p>Lightfastness >6 EN ISO 105-B02:1998 and 105 B02/A01:2002</p> <p>Colour fastness to rubbing Dry: 4-5 Wet: 4-5 EN ISO 105-X12:2002</p> <p>Notes: Variations in weave, shading, slubs, and texture give this fabric its unique personality and form part of its design.</p>	<p>PERFORMANCE+ Easy to clean, longlasting fabrics</p> <p>Washing conditions </p> <p>Soiling and cleanability 4-5 FORD FLTM BN 112-08:2005</p> <p>Dimensional change domestic washing and drying (%) Warp: -3 Weft: -2 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>When confectioning or washing the sofa cover with veloro please attach a protective cloth.</p> <p>Ignitability</p> <table border="0"> <tr> <td>BS5852 Source 0</td> <td>EN1021-Part 2:2006</td> </tr> <tr> <td>EN1021-Part 1:2006</td> <td>BS 7176 Low Hazard</td> </tr> <tr> <td>CAL TB 117:2013</td> <td>UNI 9175 Clase 3IM</td> </tr> <tr> <td>NFPA 260:2013</td> <td></td> </tr> <tr> <td>BS5852 Source 1</td> <td></td> </tr> </table>	BS5852 Source 0	EN1021-Part 2:2006	EN1021-Part 1:2006	BS 7176 Low Hazard	CAL TB 117:2013	UNI 9175 Clase 3IM	NFPA 260:2013		BS5852 Source 1	
BS5852 Source 0	EN1021-Part 2:2006											
EN1021-Part 1:2006	BS 7176 Low Hazard											
CAL TB 117:2013	UNI 9175 Clase 3IM											
NFPA 260:2013												
BS5852 Source 1												

Environmental considerations

 <p>16% recycled yarn</p> <p>10% GRS recycled PET bottles 6% Recycled CO 77% Low impact yarn (PP) 7% MA</p>	<p>Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p>Carbon footprint 3,7 kg CO₂ eq/m</p> <p>Water consumption 85,21 liters/m</p>	<p> UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p>
---	--	---

Designed and Crafted
in Terrassa (Barcelona)

Certificates

