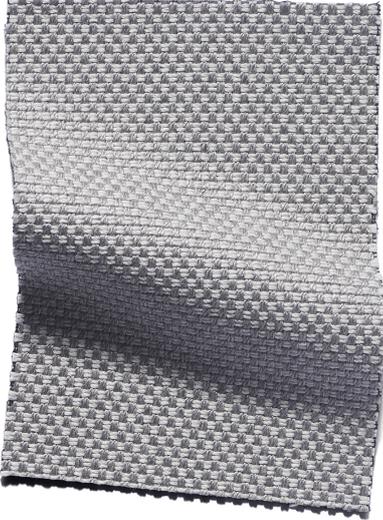



outdoor • waterproof • fire resistant • easy stain release • bleach cleanable

General Information	Specifications	Care
 <p>Composition 80%PP 18%PES REC 2%PU</p> <p>Width 140 + 4cm</p> <p>Weight 764 gr/m² ± 5 % 1070 gr/lm ± 5 %</p> <p>Custom code UE: 5903.20.90 USA: 5903.20.18.00</p> <p>Laboratory test number IN-00261-2017</p>	<p>Seam slippage resistance (mm) Warp: 2,00 / Weft: 3,00 EN ISO 13936/2:2004</p> <p>Abrasion resistance (End point) >100.000 EN ISO 12947-2:2016</p> <p>Pilling resistance 5 EN ISO 12945/2:2000</p> <p>Lightfastness to weather ≥6 EN ISO 105-B04:1997 (1000 hours)</p> <p>Colour fastness to rubbing Wet: 4-5 / Dry: 4-5 EN ISO 105-X12:2002</p> <p>Colour fastness to domestic and commercial laundering (30°) 4-5 EN ISO 105-C06:1997/AC:2009</p> <p>Resistance to water penetration >2000mbar</p> <p>Resistance to putrefaction (Mould & bacterium resist.) <u>Yes</u> EN 20811:1992 - AATCC 30:2004</p> <p>Swimming pool chlorine fastness 4-5 EN ISO 105-E03:1993</p> <p>Sea water fastness 4-5 EN ISO 105-E02:1996</p>	<p>Washing conditions</p>  <p>Dimensional change domestic washing and drying (%) Warp: -3 Weft: -1 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>Bleach cleanable 80% water 20% bleach. In case of mould growth, machine-wash with a mild laundry detergent and add 0,2 liter of household bleach to the first rinse cycle. Wash at 40°C during at least 30 minutes. Use gentle cycle with minimal centrifugation.</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p> <p>Notes: Recommendation: Distance overlook and stitch: 12 mm + 0,5 mm minimum Needle thickness: 110 Nm Thread: Polyester - Cotton 74 Tex (n°36) Stitch density: 4.0 stitches+0,1 stitches/cm</p> <p>Ignitability</p> <p>BS5852 Source 0 <u>Upon Request:</u> EN1021-Part 1:2006 BS 7176 Low Hazard CAL TB 117:2013 UNI 9175 Class 3IM NFPA 260:2013 BS5852 Source 1 EN1021-Part 2:2006 IMO Anexo 1 Parte 8</p>

Environmental considerations

 <p>18% recycled yarn</p> <p>18% GRS recycled PET bottles 82% Low impact yarn (PP)</p>	<p>Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p>Carbon footprint</p> <p>4,72 kg CO₂ eq / m <u>11,78% less since 2020</u></p> <p>Water consumption</p> <p>67,24 liters / m <u>11,22% less since 2020</u></p>	 <p>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Calculation methodology: Aware V1.02 ReCiPe Midpoint (H) 2016 v1.04 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03 Software: SimaPro 9.4.01</p>
--	---	---

Designed and Crafted
in Terrassa (Barcelona)

